



ECO-WET® FOR BROADACRE

A unique multi-purpose soil wetter suitable for both in-furrow and boom application


TRIPLE ACTION • **PENETRATE**
• **RETAIN**
• **ACTIVATE**

Triple-action formula



Penetrant:

Eco-Wet® utilises both fast-acting and controlled release surfactant technology containing polar and non-polar properties to facilitate the initial rapid 'breaking' of repellency, whilst also maintaining improved availability and consistent distribution of soil moisture during the growing season.



Retainer:

Importantly Eco-Wet® also contains a polymer humectant retainer that exhibits significant capillary actions, which promotes the 'wicking' of water (via capillary action) to the treated area - further increasing overall moisture levels in the greater soil profile.



Activator:


Increased moisture availability
+ Cation Exchange of nutrients
+ Microbial stimulation

Eco-Wet® activates fertiliser and holds it in a buffered CEC solution ensuring immediate plant availability whilst reducing leaching and volatilisation.

In non-wetting conditions, Eco-Wet® can be applied well behind the press wheel on the soil surface (ensuring it is not buried) as well as at seeding depth close to the


Applied to soil surface behind press wheel:

Spraying a narrow band of Eco-Wet® into the base of the furrow well behind the press wheels improves infiltration of water harvested into the base of the furrow and root establishment in highly repellent soils.

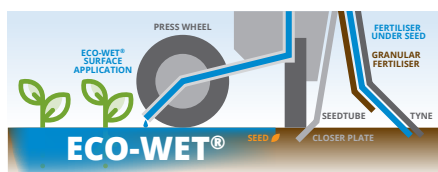

Applied to subsoil close to seed:

In furrow seed applications of Eco-Wet® needs to be as close as possible to the seed. Burying lower in the soil profile will slow availability of water and nutrients by putting it further away from the seed zone.

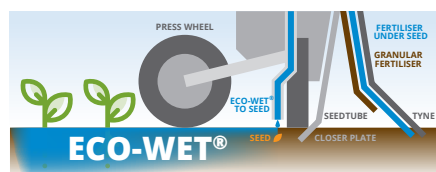

APPLICATION RATES

App. Method	Rate 10" Spacing	Rate 12" Spacing	Min. Dilution
IN-FURROW TOP TREATMENT	2-3L/ha	1.75-2.5L/ha	1:10
IN-FURROW SEED TREATMENT	3L/ha	2.5L/ha	1:10
BOOM APPLICATION	5L/ha	5L/ha	1:10

fertiliser for life



ECO-WET® FOR BROADACRE

A unique multi-purpose soil wetter suitable for both in-furrow and boom application

TRIPLE ACTION • PENETRATE
• RETAIN
• ACTIVATE

Eco-Wet® is a concentrated product and should be pre-diluted 1:1 with water prior to mixing in Nurse tank with other fertilisers. Minimal agitation will be required once pre-diluted Eco-Wet® and compatible fertilisers are combined. However, left un-agitated, minor separation may occur after several hours, but will quickly re-mix with minor agitation. Additional combinations of fertilisers are possible, however physical compatibility should always be checked with an appropriate jar test.

Pre-dilution of Eco-Wet®.

1. Fill IBC with 500L of water.
2. Gently agitate water whilst gravity feeding Eco-Wet® to water in IBC.
3. Avoid splashing solution by returning recirculated solution below 500L mark.

Recommended mixing procedure prior to pumping into nurse tank.

1. Half fill liquid cart tank with water and /or compatible fertilisers.
2. Pre-dilute Eco-Wet® 1:1 with water whilst gently agitating.
3. Gently agitate liquid cart whilst adding pre-diluted Eco-Wet®
4. Add compatible nutrition.
5. Bring up to volume with remaining water / compatible fertilisers.

20L water + 30L compatible nitrogen + 3L Eco-Wet® mixture is stable for up to two hours without agitation, however minimal agitation is required to regain homogeneity.

Eco-Wet® compatibility with Nitrogen.

20L of water + 7L Eco-Wet® + 30L Nitrogen compatible at tested range of 15-35°C.

Additional Nutrition may also be applied with Eco-Wet® subject to compatibility with total solution.

Physical compatibility test.

1. In a screw top jar add 500mL of water.
2. Add Eco-Wet® i.e. for 2L/ha application rate add 20 millilitres.
3. Cap the jar and shake it well.
4. Add additional products ie Express® TE, 5L/ha rate add 50 millilitres.
5. Cap the jar and shake it well.
6. Let the jar stand undisturbed for at least two hours, but preferably overnight.
7. Look for any obvious incompatibility such as flocculation or precipitation. Some settling of flowable or powder products is normal. But if you have difficulty in re-suspending sediment then extra agitation during spraying is needed or it may cause blockages and uneven application rates.
8. Dispose of the jar and its contents safely after this test.

Note: tested ingredients should be added in order of least solubility first, some products may require predilution before adding to jar as per normal practice.

